

Installation of a Kids Tramp 2 m — with concrete bedding


Suitable Kids Tramp models

- Art. 97510: Kids Tramp "Kindergarten XL"
- Art. 97112: Kids Tramp "Kindergarten Loop XL"
- Art. 97500: Kids Tramp "Playground XL"
- Art. 97012: Kids Tramp "Playground Loop XL"
- Art. 97500B: Kids Tramp "Playground XL" + special coating
- Art. 97012B: Kids Tramp "Playground Loop XL" + special coating

Preparing a square pit

- Dimensions: 210 x 210 cm
- Depth: 73 cm
- On cohesive soil, a vertical recess should be possible in a short time. On non-cohesive or loose soils, an angle of slope should be maintained to prevent subsequent slipping of the edges.

Floor plan / top view

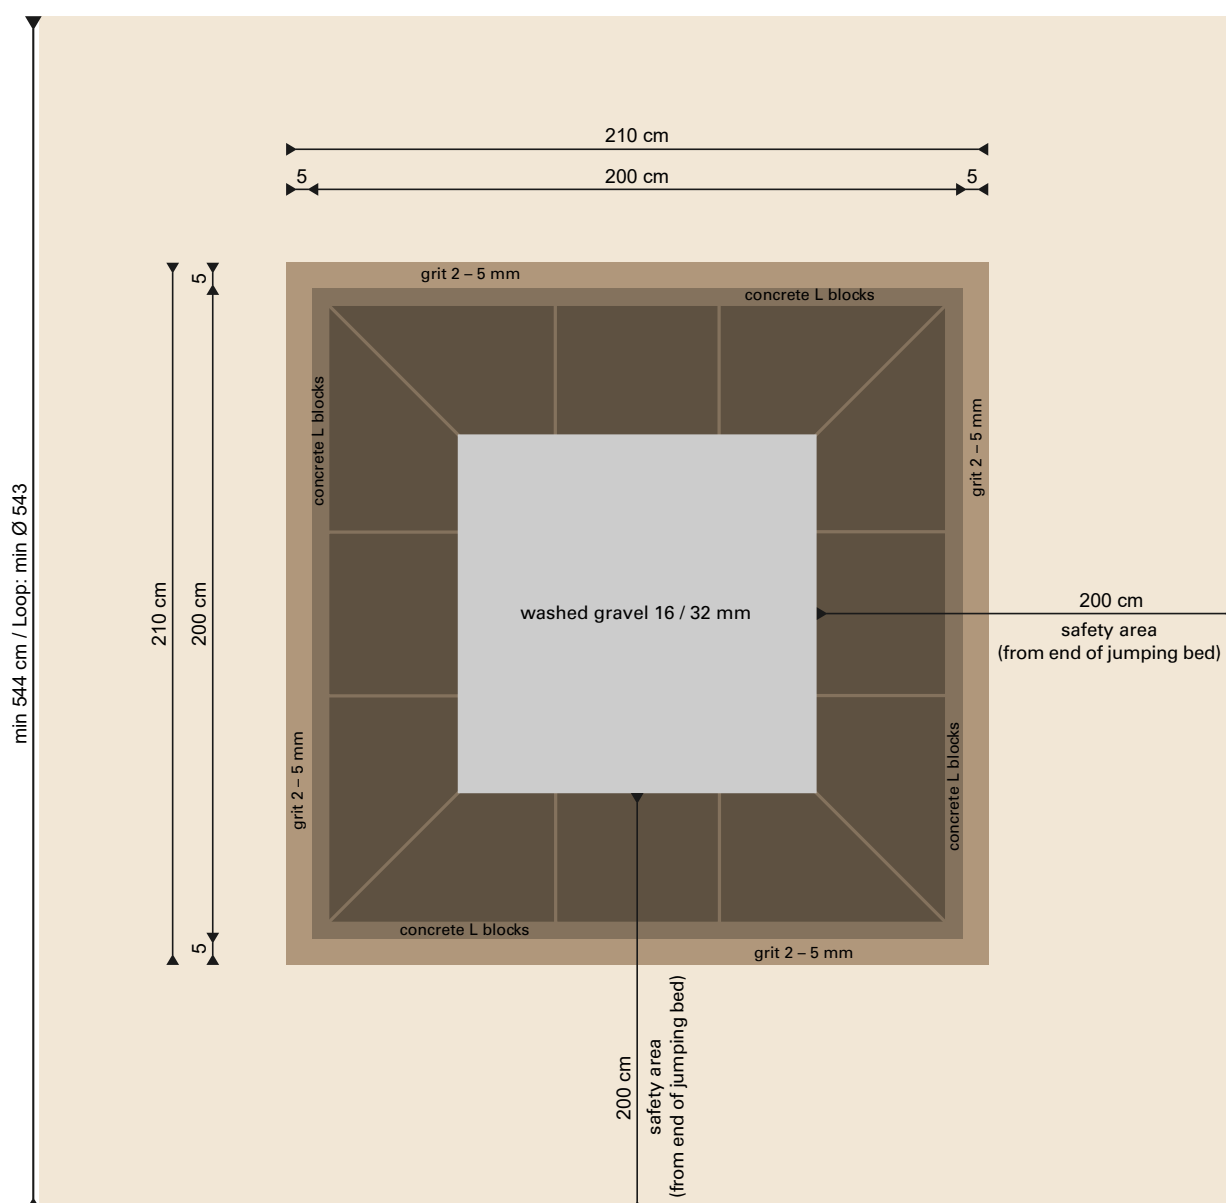

Required material

- 0,75 m³ lean concrete
- 8x 40/40/22 cm concrete L blocks, mitre cut
- 12x 40/40/22 cm concrete L blocks
- 0,10 m³ washed gravel 16 – 32 mm
- 0,10 m³ grit 2 – 5 mm

Pit preparation

- Place concrete L blocks with external dimensions measuring 200 x 200 cm on a lean concrete in the pit. The top edge of the concrete L blocks should be 31 cm below the ground level.
- After installing the concrete support, fill the gap between the concrete L blocks with washed gravel (16/32 mm) to a depth of 12 cm.
- Once preparations are complete, the Kids Tramp can be placed on the concrete L blocks. Fill the remaining cavities between the equipment and the existing ground with 2 – 5 mm grit.
- Add humus to the top 5 – 10 cm to create a seamless transition to the existing ground.
- Drainage must be added to cohesive (impermeable) soil. The pit must be dug 15 cm deeper and a drainage pipe fitted which can be connected to an appropriate outflow (e.g. sewerage system).
- Then compact 15 cm of frost protection and base layer/gravel mix across the entire surface and then apply the concrete layer.

Attention: the Kids Tramp must be installed on a level surface and not on a mound or slope.



Profile diagram

